



MINI



MINI

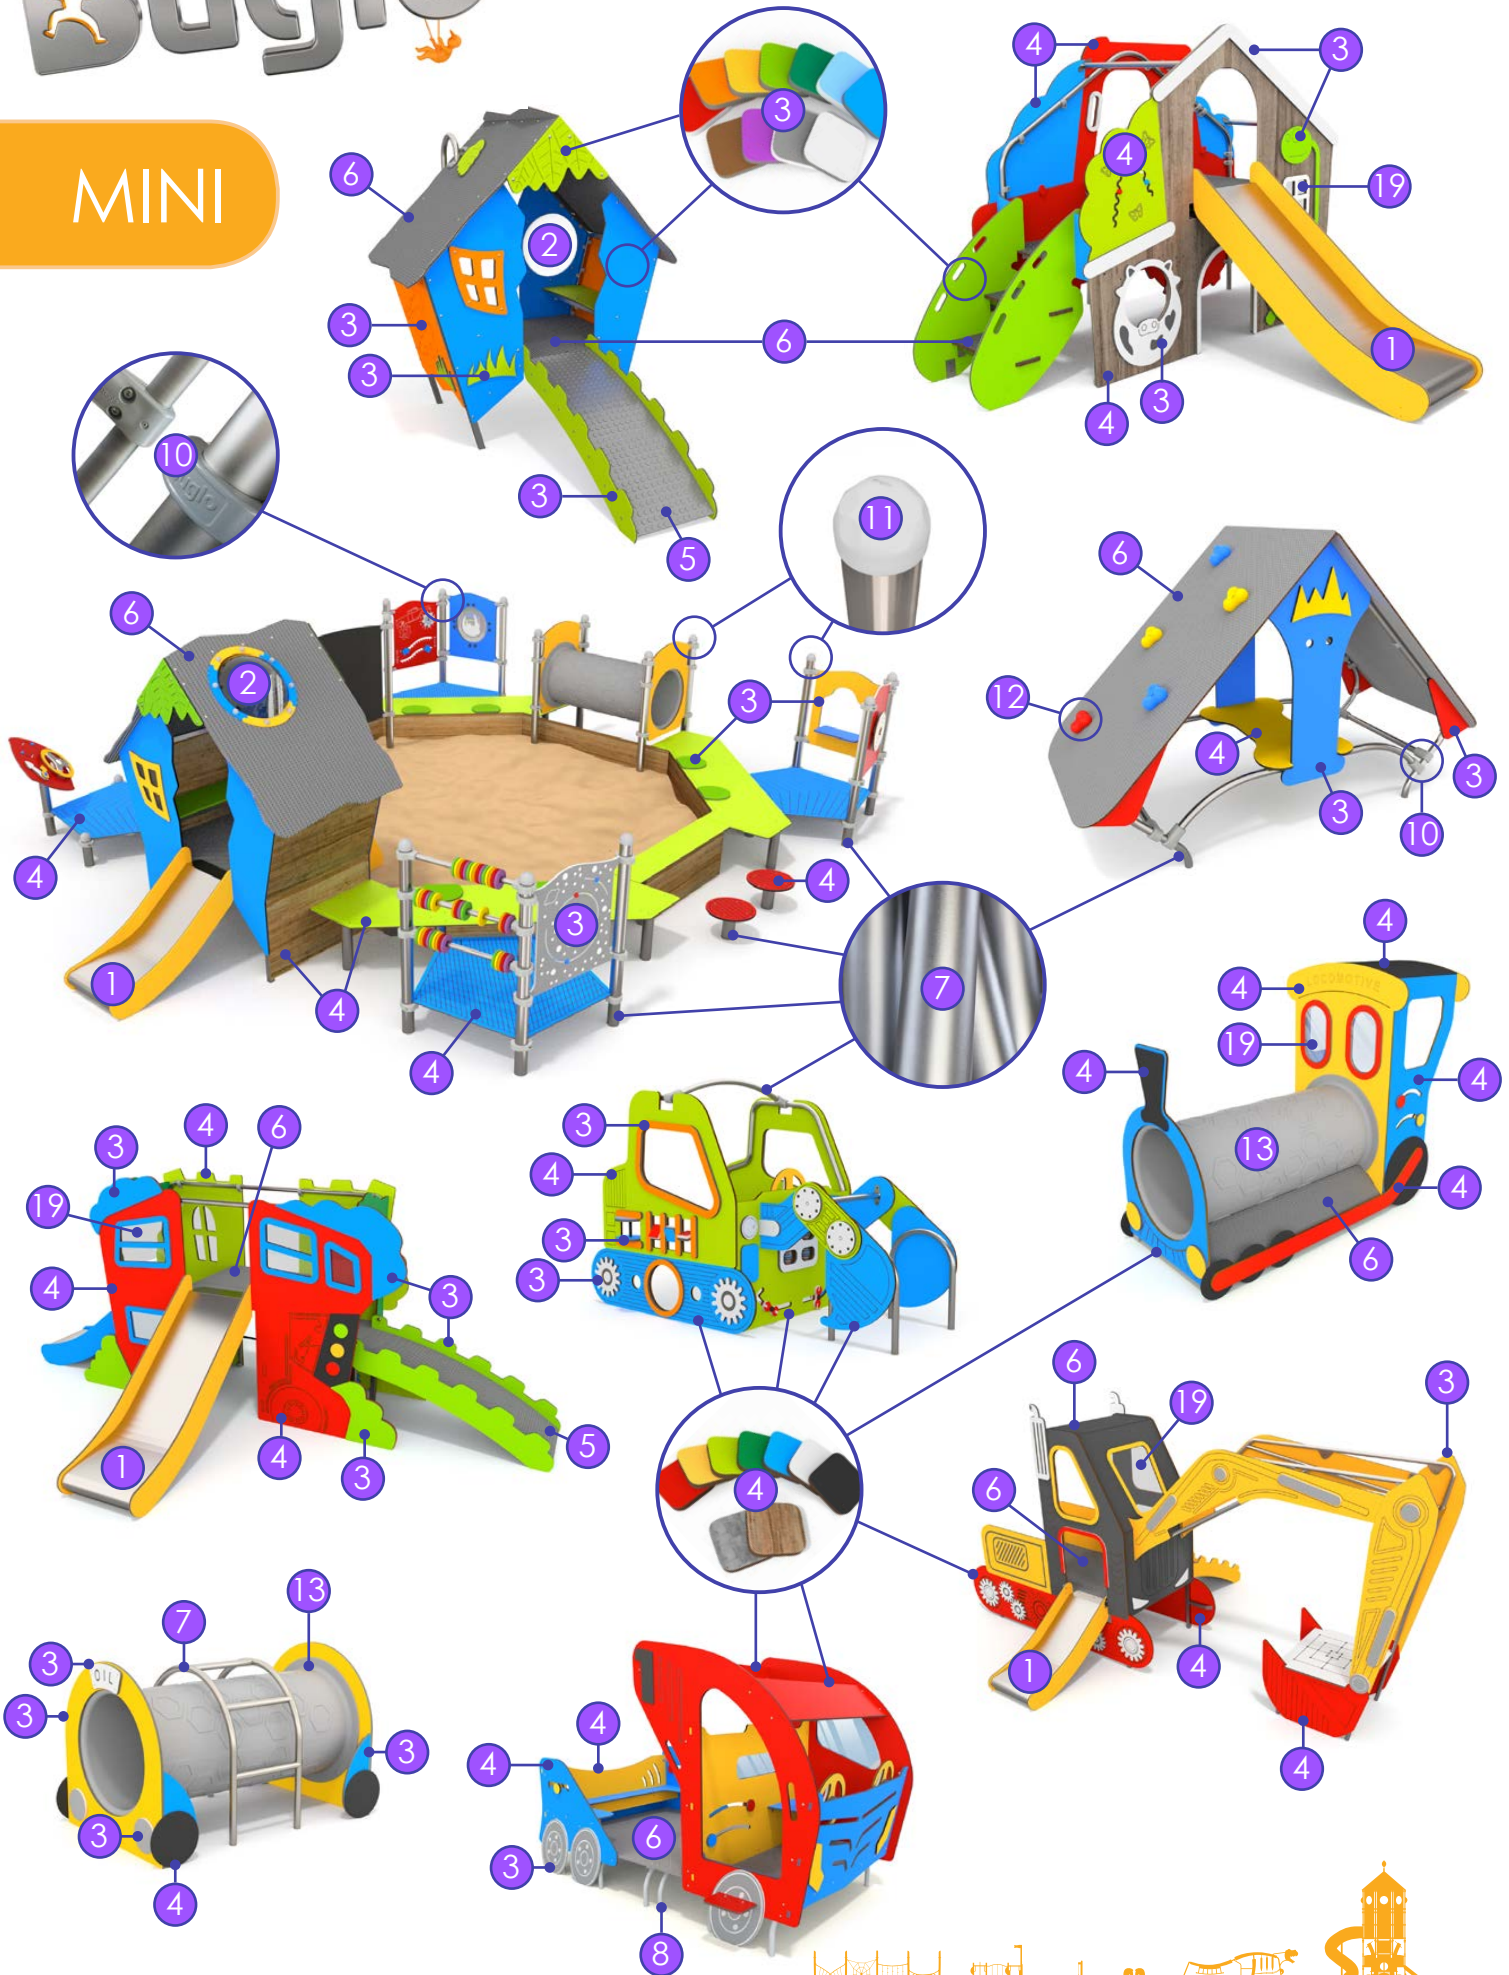

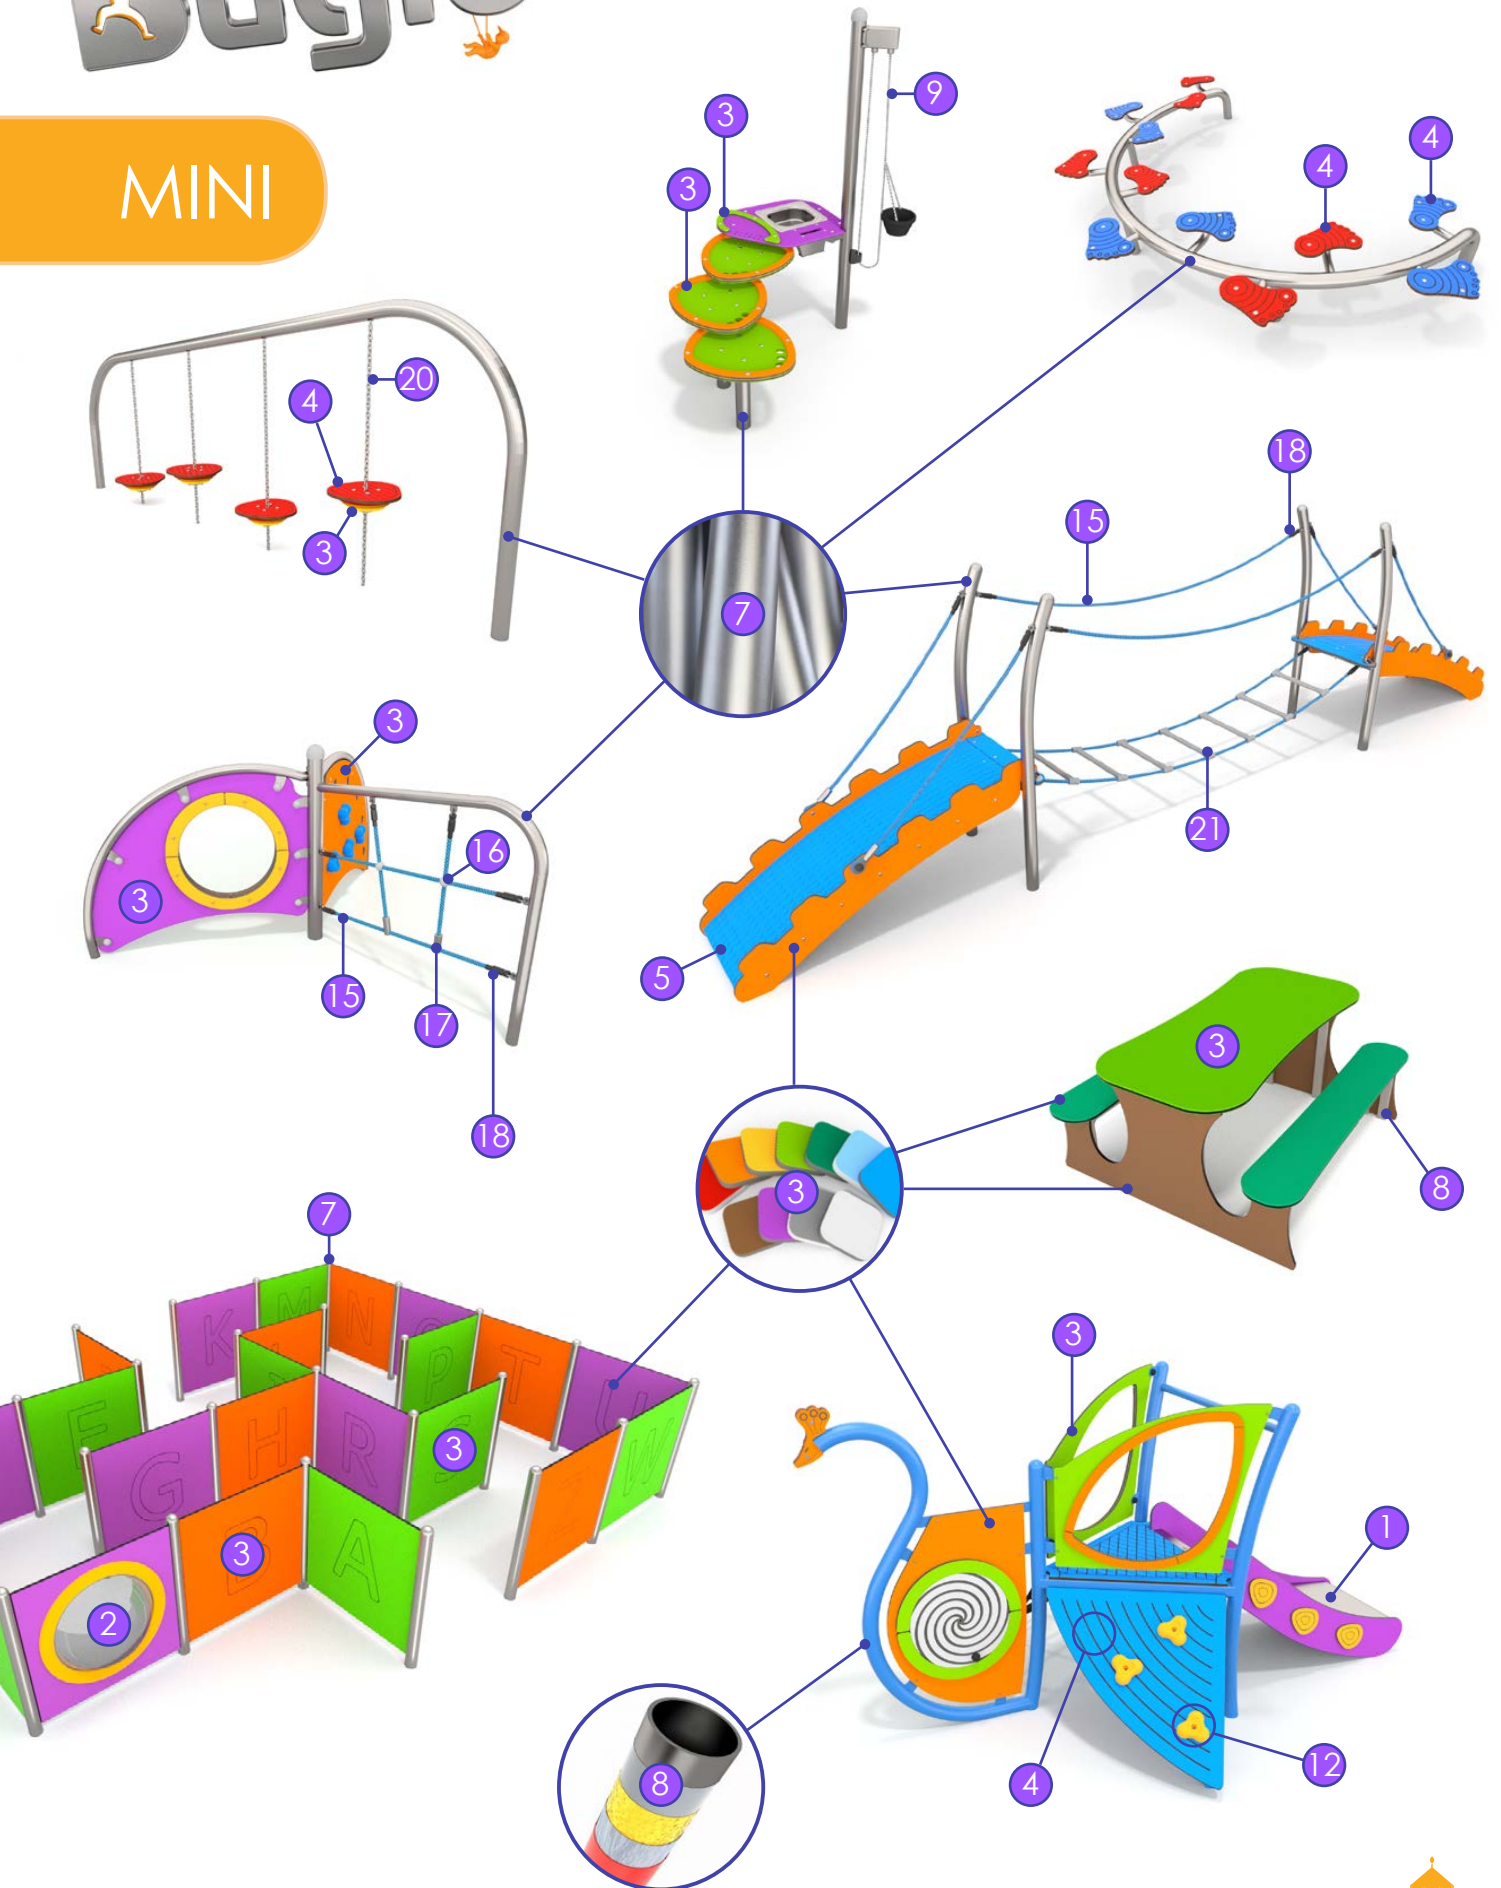

1 Slides made of stainless steel AISI 304. Metal sheet with a thickness of 2 mm formed in a CNC technique. Side panels made of HDPE polyethylene 15 mm, in the highest quality and totally damp-proof and resistant to UV.




2 Hemispheric window with a diameter of 400 mm. Material: heat - formed polycarbonate 5 mm thick, resistant to vandalism.



3 Plates of the walls made of colourful triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp-proof and resistant to UV.



4 Plates of the walls and platforms made of colourful 13 mm HPL (black plates made of 8 mm HPL), in the highest quality, totally damp-proof and resistant to UV.



5 Anti-slip 18 mm HDPE plate. Very high resistance to weather conditions and attrition.



6 Anti-slip anthracite 10 mm HPL platform plate with a very high resistance to weather conditions and attrition.



7 Solid construction made of stainless steel AISI 304 totally resistant to weather conditions.



8 Solid construction made of black steel S235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested. 1 - steel, 2 - sandblasting, 3 - iron phosphatizing, 4 - zinc base, 5 - polyester powder paint.



9 Sand bucket made of soft rubber. The lift and the chain are made of stainless steel.



10 System of connectors and clamps made of strong aluminum alloy. Aluminum is secured by the process of electroplating and powder coating with polyester paint UV resistant and QUALICOAT attested.



11 Safe pipe plugs made of injection molded polyamide.



12 Climbing rocks made of chip-pings and colourful polyester resin.



13 Tube made of LDPE polyethylene rotationally molded with the inner diameter of 53.3 cm and the length of 125 cm.



14 Connecting elements like screws, nuts, washers made of stainless steel. Vandal-proof screw plugs made of injection molded polyamide.



15 Polypropylene ropes pp-multi-split type with a steel core and a diameter of 16 mm.



16 Solid and esthetic rope connectors made of injection molded polyamide.



17 Rope endings pressed in a sleeve made of durable aluminum alloy.



18 Ends of ropes clamped in sleeves made of durable aluminum alloys.



19 The windows are made of safe polycarbonate 8 mm thick.



20 Attested 6 mm stainless steel chains.



21 Rope ladder steps and rope knots made of injection molded polyamide.