


Information about the product

Dimensions	105 x 49 cm
Safety zone	405 x 349 cm
Safety zone area	12 m ²
Overall height	133 cm
Free fall height	58 cm
Amount of users	1
Highest element	203 cm
Product complies with EN 1176-1:2017-12	Yes
Availability of spare parts	Yes
Age range	3-12

According to EN 1176-1:2017-12 norm, the product requires applying a safety surface according to the product's free fall height.

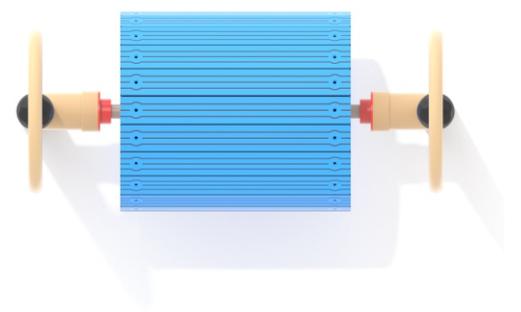


Functions

-  Spinning
-  Emotion regulation
-  Grasping
-  Balancing

Technology



A method that allows pipes to be bent at any angle while preserving the integrity of the steel surface, enabling sleek and flexible structures.

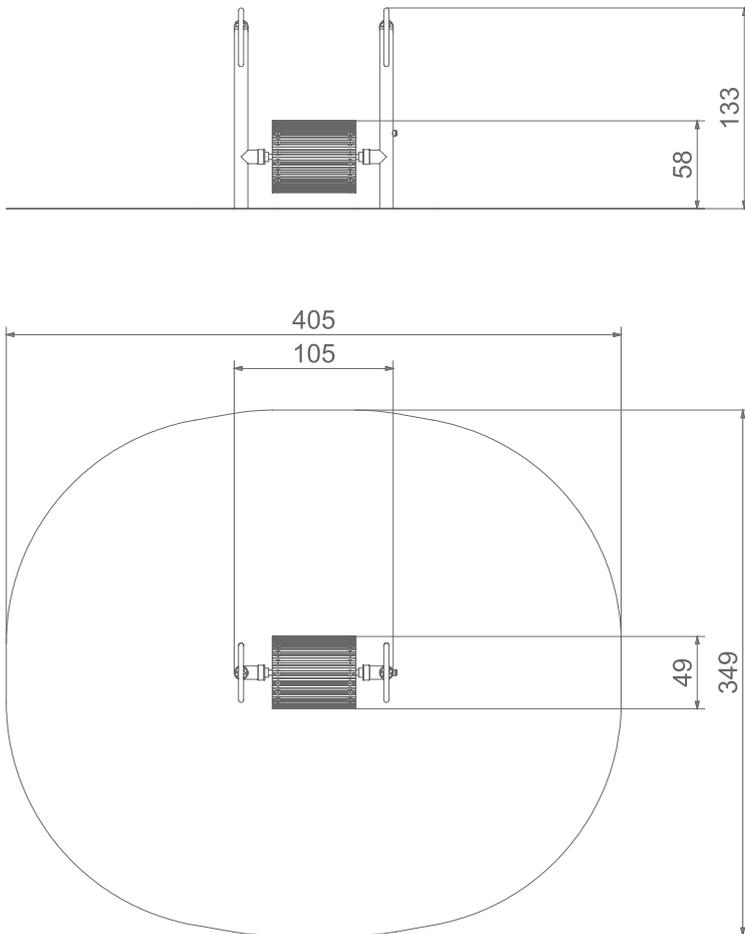


1:50

Due to the height of the free fall of the product, the EN 1176-1:2017-12 norm allows following types of fall-absorbing surfaces:

Material	Description	Minimal layer thickness mm
Top layer of the soil		
Turf		
Bark	Chipped bark of coniferous trees (no wood-based materials), the size of the pieces between 20mm to 80 mm	300
Wood chips	Mechanically fragmented wood without bark and leaves, size of the pieces between 5 mm to 30 mm	300
Sand or gravel	Particle size between 0,25 mm to 8 mm	300
Synthetic material	Synthetic material with an approval for free fall heights $\geq 58\text{cm}$	

All types of surfaces need to be preserved by adding bulk material and removing extraneous matters. Broken glass is considered to be most hazardous.

Installation method

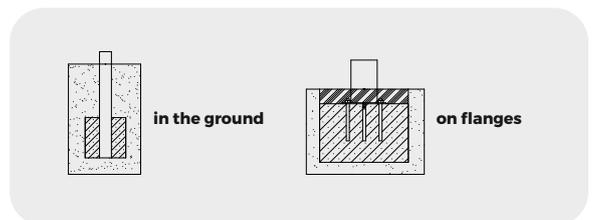

Warranty



Lifetime

The warranty covers the durability of components made of HDPE (high-density polyethylene), as well as the structural integrity of components made of black steel that has been powder galvanized and powder coated, stainless steel, and components made of hot-dip galvanized steel.



10 years

The Guaranty covers all flaws of the elements made of HPL, HDPE, stainless steel, hot-dip galvanized steel, wooden elements (pine, spruce), revealed during usage, which arise from manufacturing reasons.



5 years

The Guaranty covers all flaws of the elements made of powder coated steel, aluminum, laminate, ropes, elements made in rotomoulding technology, elements made of polyamid, polypropylene elements, revealed during usage, which arise from manufacturing reasons.



2 years

The Guaranty covers all flaws of the elements made of rubber, moving elements (bearings, joints), electronic elements, elements made of EPDM, elements made of plywood and other not mentioned before revealed during usage, which arise from manufacturing reasons.

Product description

Rotating Roller

Dimensions:

Equipment dimensions: 105 x 49 cm

Safety zone: 405 x 349 cm

Total height: 133 cm

Free fall height: 58 cm

Materials:

Support posts: black steel S235JR, powder galvanised and powder coated, diameter 88.9 x 2.6 cm

Rotating roller: panels made of coloured HPL plastic, 13 mm thick

The equipment includes at minimum:

2 x support posts with handgrips

1 x rotating roller

Materials



Solid construction made of black steel S235JR, cleaned in the sandblasting process. All elements made of black steel are subjected to a two-layer powder coating process, which includes the following stages: First layer – zinc-rich primer, Second layer – topcoat in RAL colour



Plates of the walls and platforms made of colourful 13 mm HPL (black plates made of 8 mm HPL), in the highest quality, totally damp-proof and resistant to UV.