



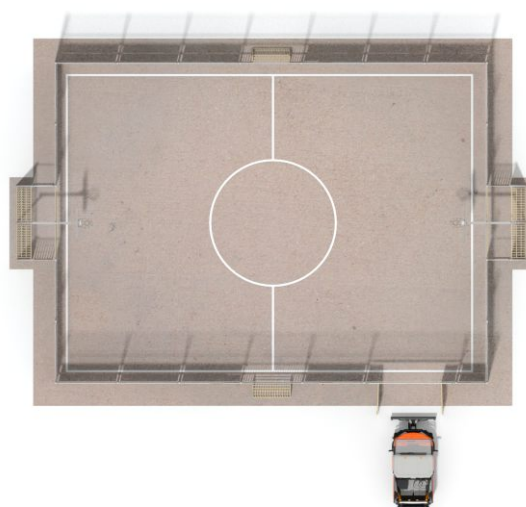

Information about the product

Dimensions	2076 x 1420 cm
Overall height	514 cm
Product complies with PN-EN 15312	TAK
Availability of spare parts	TAK

Functions

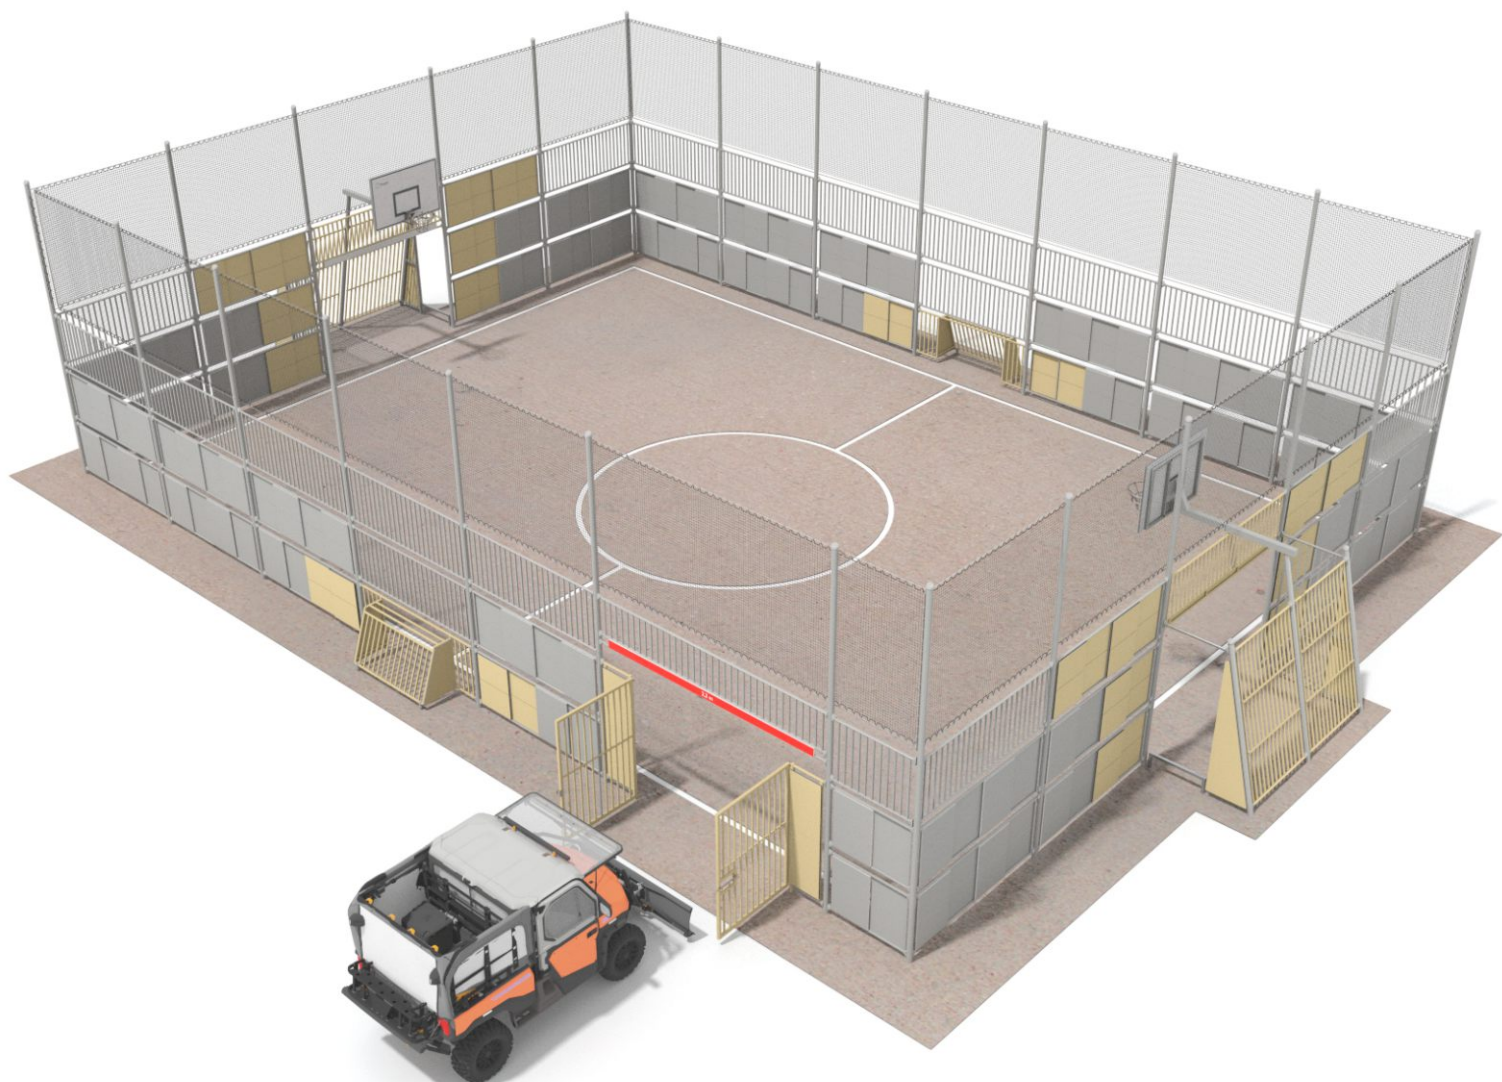


Sport



Socializing


1:200

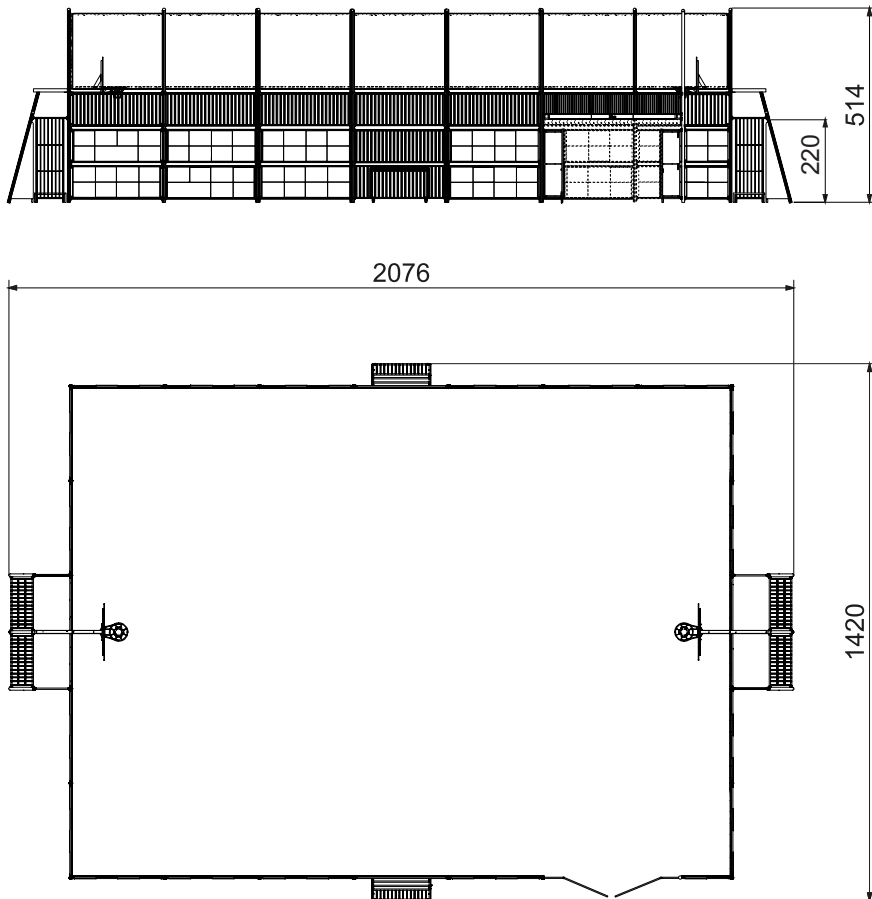

Installation method



in the ground



on flanges

Warranty



Lifetime

The warranty covers the durability of components made of HDPE (high-density polyethylene), as well as the structural integrity of components made of black steel that has been powder galvanised and powder coated, stainless steel, and components made of hot-dip galvanised steel.



10 years

The Guaranty covers all flaws of the elements made of HPL, HDPE, stainless steel, hot-dip galvanized steel, wooden elements (pine, spruce), revealed during usage, which arise from manufacturing reasons.



5 years

The Guaranty covers all flaws of the elements made of powder coated steel, aluminum, laminate, ropes, elements made in rotomoulding technology, elements made of polyamid, polypropylene elements, revealed during usage, which arise from manufacturing reasons.



2 years

The Guaranty covers all flaws of the elements made of rubber, moving elements (bearings, joints), electronic elements, elements made of EPDM, elements made of plywood and other not mentioned before revealed during usage, which arise from manufacturing reasons.

Product description

6407

Multiuse court for play and games. Dimensions: 2076 x 1420 cm Total height: 514 cm Materials: *Support post structure: Black steel S235JR cleaned by shot-blasting and protected against corrosion by zinc-rich primer in powder and powder coating. Pipe 76.1 x 2.0 mm * Minigoal structure: - Wall panels made of colored three-layer HDPE polyethylene, 15 mm thick - Vertical support posts: Black steel S235JR cleaned by shot-blasting, protected against corrosion by zinc-rich primer in powder and powder coating, pipe dimensions min. 76.1 mm x 2.6 mm - Vertical grid in the goal: Black steel S235JR cleaned by shot-blasting and protected against corrosion by zinc-rich primer in powder and powder coating; Profile min 20x20x2.0 mm * Basketball hoop structure: - Basketball backboard made of 15 mm thick HDPE. Wall panels made of colored three-layer HDPE polyethylene, 15 mm thick - Hoop rim made of stainless steel pipe sized 20.0 x 2.5 cm - Support post structure: Black steel S235JR cleaned by shot-blasting and protected against corrosion by zinc-rich primer in powder and powder coating. Metal elements made of black steel S235JR cleaned by shot-blasting, pipe dimensions 76.1 mm x 2.0 mm - Goal truss structure: Black steel S235JR cleaned by shot-blasting and protected against corrosion by zinc-rich primer in powder and powder coating. Metal elements made of black steel S235JR cleaned by shot-blasting; Profile min 20x20x2.0 mm * Steel side barrier: Black steel S235JR cleaned by shot-blasting and protected against corrosion by zinc-rich primer in powder and powder coating.; horizontal rods Pipe min 33.7x2.9 mm, vertical Profile min 20x20x2.0 mm; barrier dimensions min 240 x 88 mm * Wall panels made of colored three-layer HDPE polyethylene, 15 mm thick * Fasteners such as vandal-proof screws and nuts made of stainless steel * Patented system of connectors and clamps made of strong aluminum alloys * Vandal-proof screw caps made of injection-molded polyamide * Vertical post caps made of rubber. Net (ball catcher) made of polypropylene PP with mesh size 4.5 x 4.5 cm and thickness 3 mm The equipment includes at least: *2 x basketball hoop *2 x minigoal *22 x steel side barrier *44 x HDPE panel 15 mm *2 x ball catcher 13 x 2 m *2 x ball catcher 17.5 x 2 m *2 x access gate *1 x maintenance gate with two doors

The maintenance gate can be implemented to arena by side height of 304, 414 and 514cm. The maintenance gate allows operation to and out from the arena. The opening width of 250cm and the height 220cm is one of the widest and highest clearances in the global MUCA arena market. In double-leaf service gates, independent control allows for opening only one gate door at a time, providing a convenient pedestrian passage function. This solution eliminates the need for installing an additional wicket gate. Once used for pedestrian function, one of the doors is secured to the ground by a drop bolt. The gate doors are secured to one another by a pad bolt, with a staple for a padlock.

Dimensions:

Dimensions of the maintenance gate: 383 x 8,3 x 300 cm

Dimensions of pipes and profiles used:

- » profile: 40x40x2; 40x20x2; 20x20x2 mm
- » supporting column: Ø 76,1 x 2,6 mm
- » pipes: Ø 33,7 x 2,9; 17,2 x 2 mm

Materials:

Optionally available colorful plates made of triple layered 15 mm HDPE. The polyethylene use is of the highest quality, totally damp proof and resistant to UV.

Construction of the maintenance gate is made of made of steel pipes with a minimum diameter of 88.9 mm, manufactured from black steel, shot-blasted and protected against corrosion by zinc-rich primer in powder and powder coating. System of connectors made of strong aluminum alloy. Aluminum clamps are treated by chromating.

The product includes at least:

- 1 x Arena
- 2 x Football goals
- 2 x Basketball hoops
- 1 x Frame structure bars in the span or by HDPE plates.
- **2 x Maintenance gate door:**
 - 1 x Drop bolt
 - 1 x Pad bolt, with a staple for a padlock. Padlock is not included.