





ORGANIQ material specification





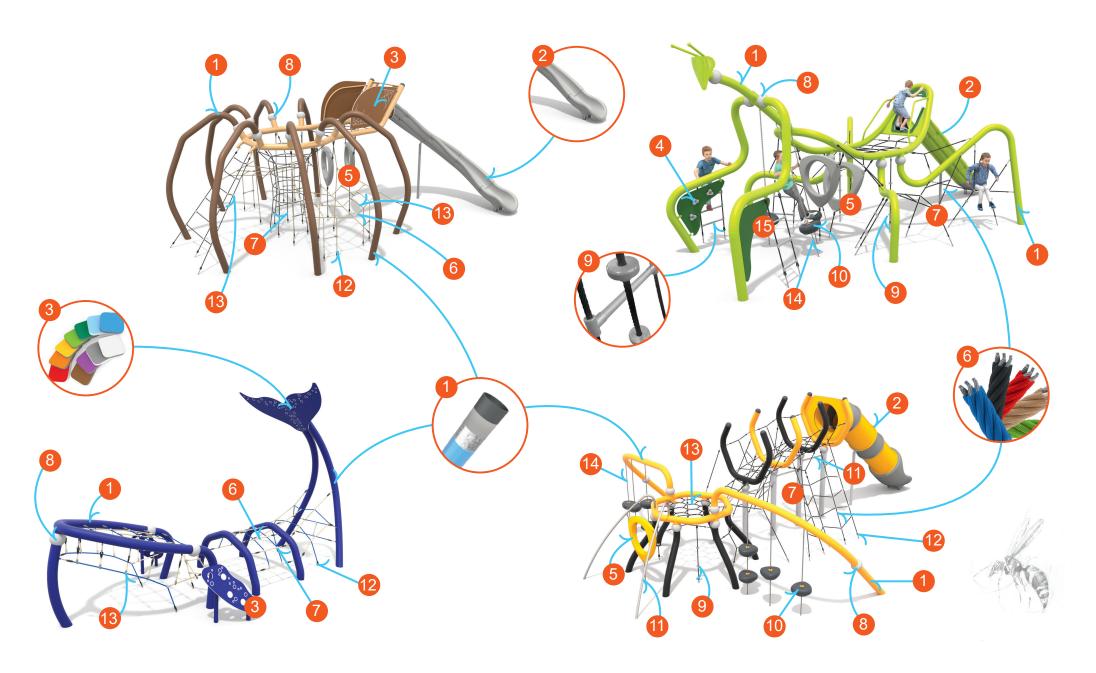



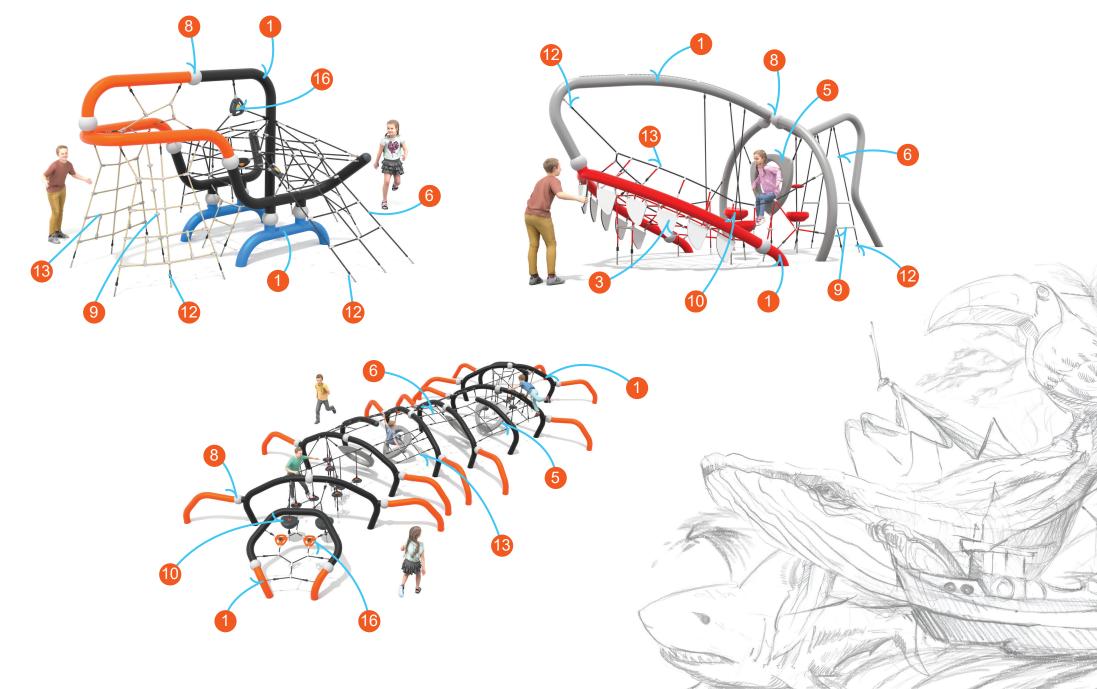

Buglo





Solid construction made of black steel \$235JR, cleaned in the sandblasting process. Protected against corrosion by galvanizing and powder coating with polyester paint QUALICOAT attested.



Modular polyethylene BUGLO slides made of rotomoulded LDPE type material.



Plates of the walls made of colourful triple layered 15 mm HDPE polyethylene, in the highest quality, totally damp--proof and resistant to UV.



Climbing rocks made of chippings and colourful polyester resin.



Ergonomically-shaped polyethylene rings improving the physical well-being and motor coordination.



Polypropylene ropes ppmultisplit type with a steel core and a diameter of 16 mm.



Solid and esthetic rope connectors made of injection molded polyamide.



Tube covers made of injection molded polyamide.



Rope ladder steps and rope knots made of injection molded polyamide.



The passage module is made of a 6mm stainless steel chain, 15 mm thick HDPE boards and an 18 mm thick HDPE non-slip HDPE board.



Solid construction made of stainless steel AISI 304 totally resistant to weather conditions. Solid construction made of stainless steel AISI 304 totally resistant to weather conditions.



Ends of ropes clamped in sleeves made of durable aluminum alloys.



Rope endings pressed in a sleeve made of durable aluminum alloy.



Attested 6 mm stainless steel chains.



Safe pipe plugs made of injection molded polyamide.



Handle made of rotomoulded LDPE type material.